

Tools Required



We ground notches in channel locks to hold the spring



Compress spring




Zip tie channel lock handles




Install 2 zip ties on each side of spring




Grease knuckle and install split ring

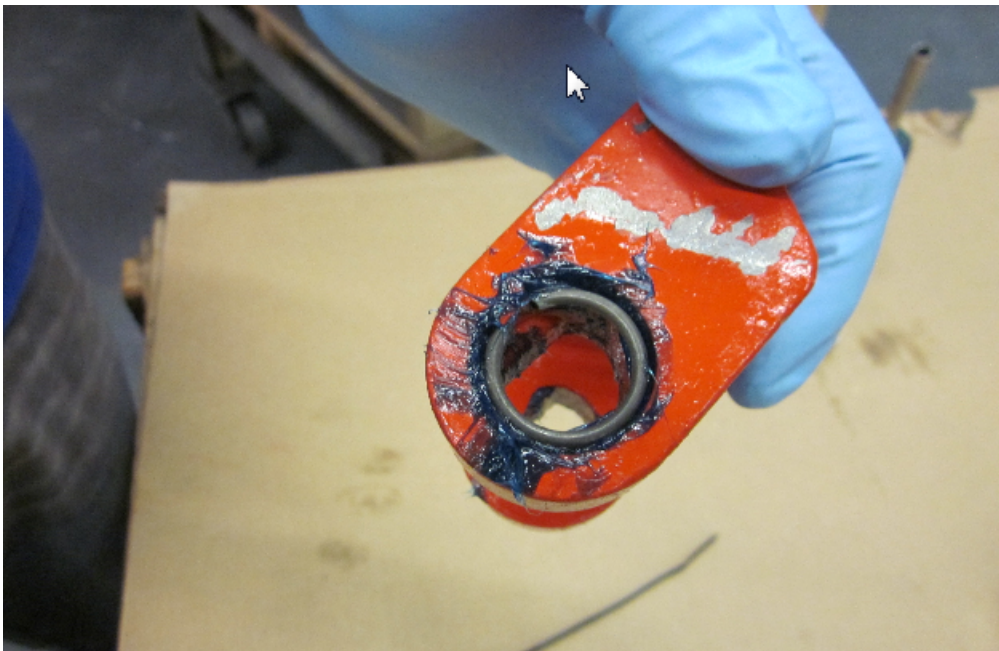

Install shaft into knuckle

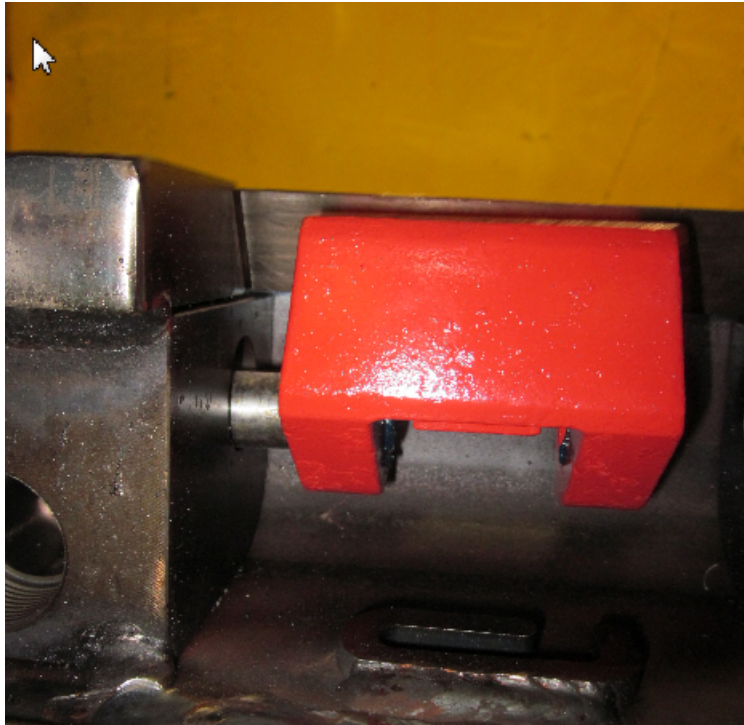

Install spring

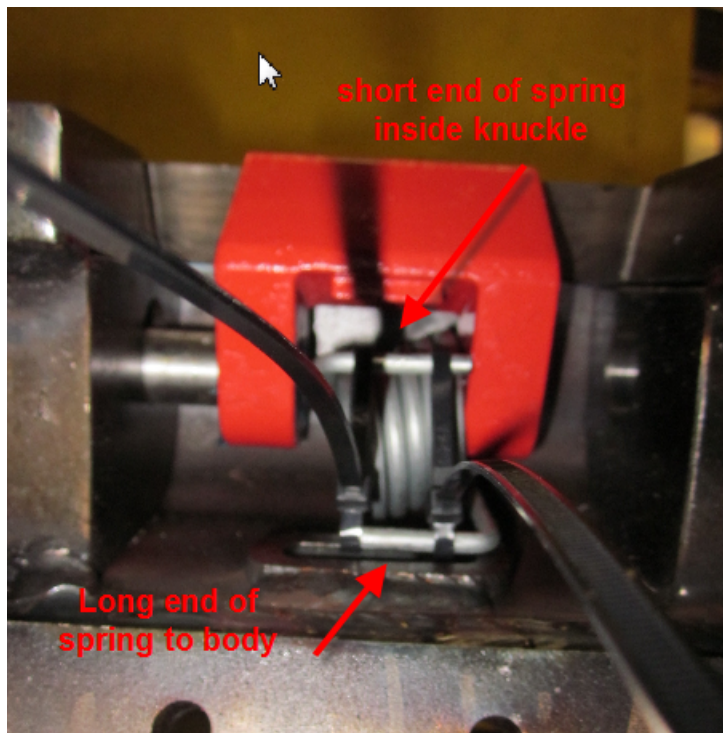

When shaft is seated fully, tap back to engage split ring on shaft.

Cut zip ties off of spring.

